



PRODUCT CATALOGUE 2026

ABOUT US

BACAPLUS, established in 2021, is a company specializing in chimney and ventilation systems. Since its inception, it has prioritized quality, reliability, and customer satisfaction in its services. Operating throughout Turkey, BACAPLUS adds value to projects with its modern technologies and professional team approach.

The company aims to create healthy, safe, and efficient environments in living and working spaces by offering chimney systems and ventilation solutions for residential, commercial, and industrial areas. Developing customized solutions for each project, BACAPLUS continues to be a reliable solution partner in the sector with its engineering expertise and application quality.


Operating with an innovative approach and a commitment to continuous improvement, BACAPLUS aims to establish long-lasting and sustainable systems by accurately analyzing customer needs. By providing services throughout Turkey, it is strengthening its position in the sector every day.

Certification



IT - ISO 9001-2008



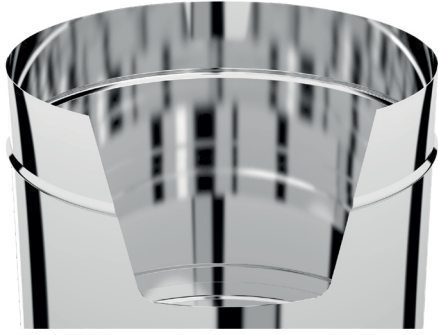

Essential Features

- Simple and fast installation.
- Suitable for in-shaft applications.

Muff	: 50 mm
Weld Type	: Continuous TIG Welding
Thickness	: 0.40 mm - 1.50 mm
Connection type	: Male / Female Connections
Diameter Range	: Ø 100 mm to 1200 mm

Technical Features

Operation Type	: Wet (W) (sealed use)
Pressure Type	: Positive (P1) (sealed use) Negative (N1) (use without gasket)
Max. Operating Pressure	: 200 Pa
Operating temperature	: 100 °C 400 °C
Material	: AISI 316L (1.4404), AISI 304 (1.4301) AISI 430 (1.4016)
Fuel Type	: Natural gas / Solid fuel / Liquid fuel

Fields of Application


- Central heating and hot water systems
- Industrial and commercial chimney systems
- Bread ovens
- Fireplaces
- Vents

Certificates

T400-N1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-P1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-N1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-P1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-N1-W-Vm-L50-(60&150)O600,Ø451-1200
T400-P1-W-Vm-L50-(60&150)O600,Ø451-1200

Chimney Labeling


Product Type	TSEN 1856	T400	N1	W	Vm	L50	O40	Q150
Standard Number	←	←	←	←	←	←	←	←
Temperature Class	←	←	←	←	←	←	←	←
Pressure Class	←	←	←	←	←	←	←	←
Condensation Product Resistance	←	←	←	←	←	←	←	←
Corrosivity category	←	←	←	←	←	←	←	←
Chimney Material	←	←	←	←	←	←	←	←
Chimney Material Thickness	←	←	←	←	←	←	←	←
Soot Fire Resistance Distance to Flammable Substances	←	←	←	←	←	←	←	←

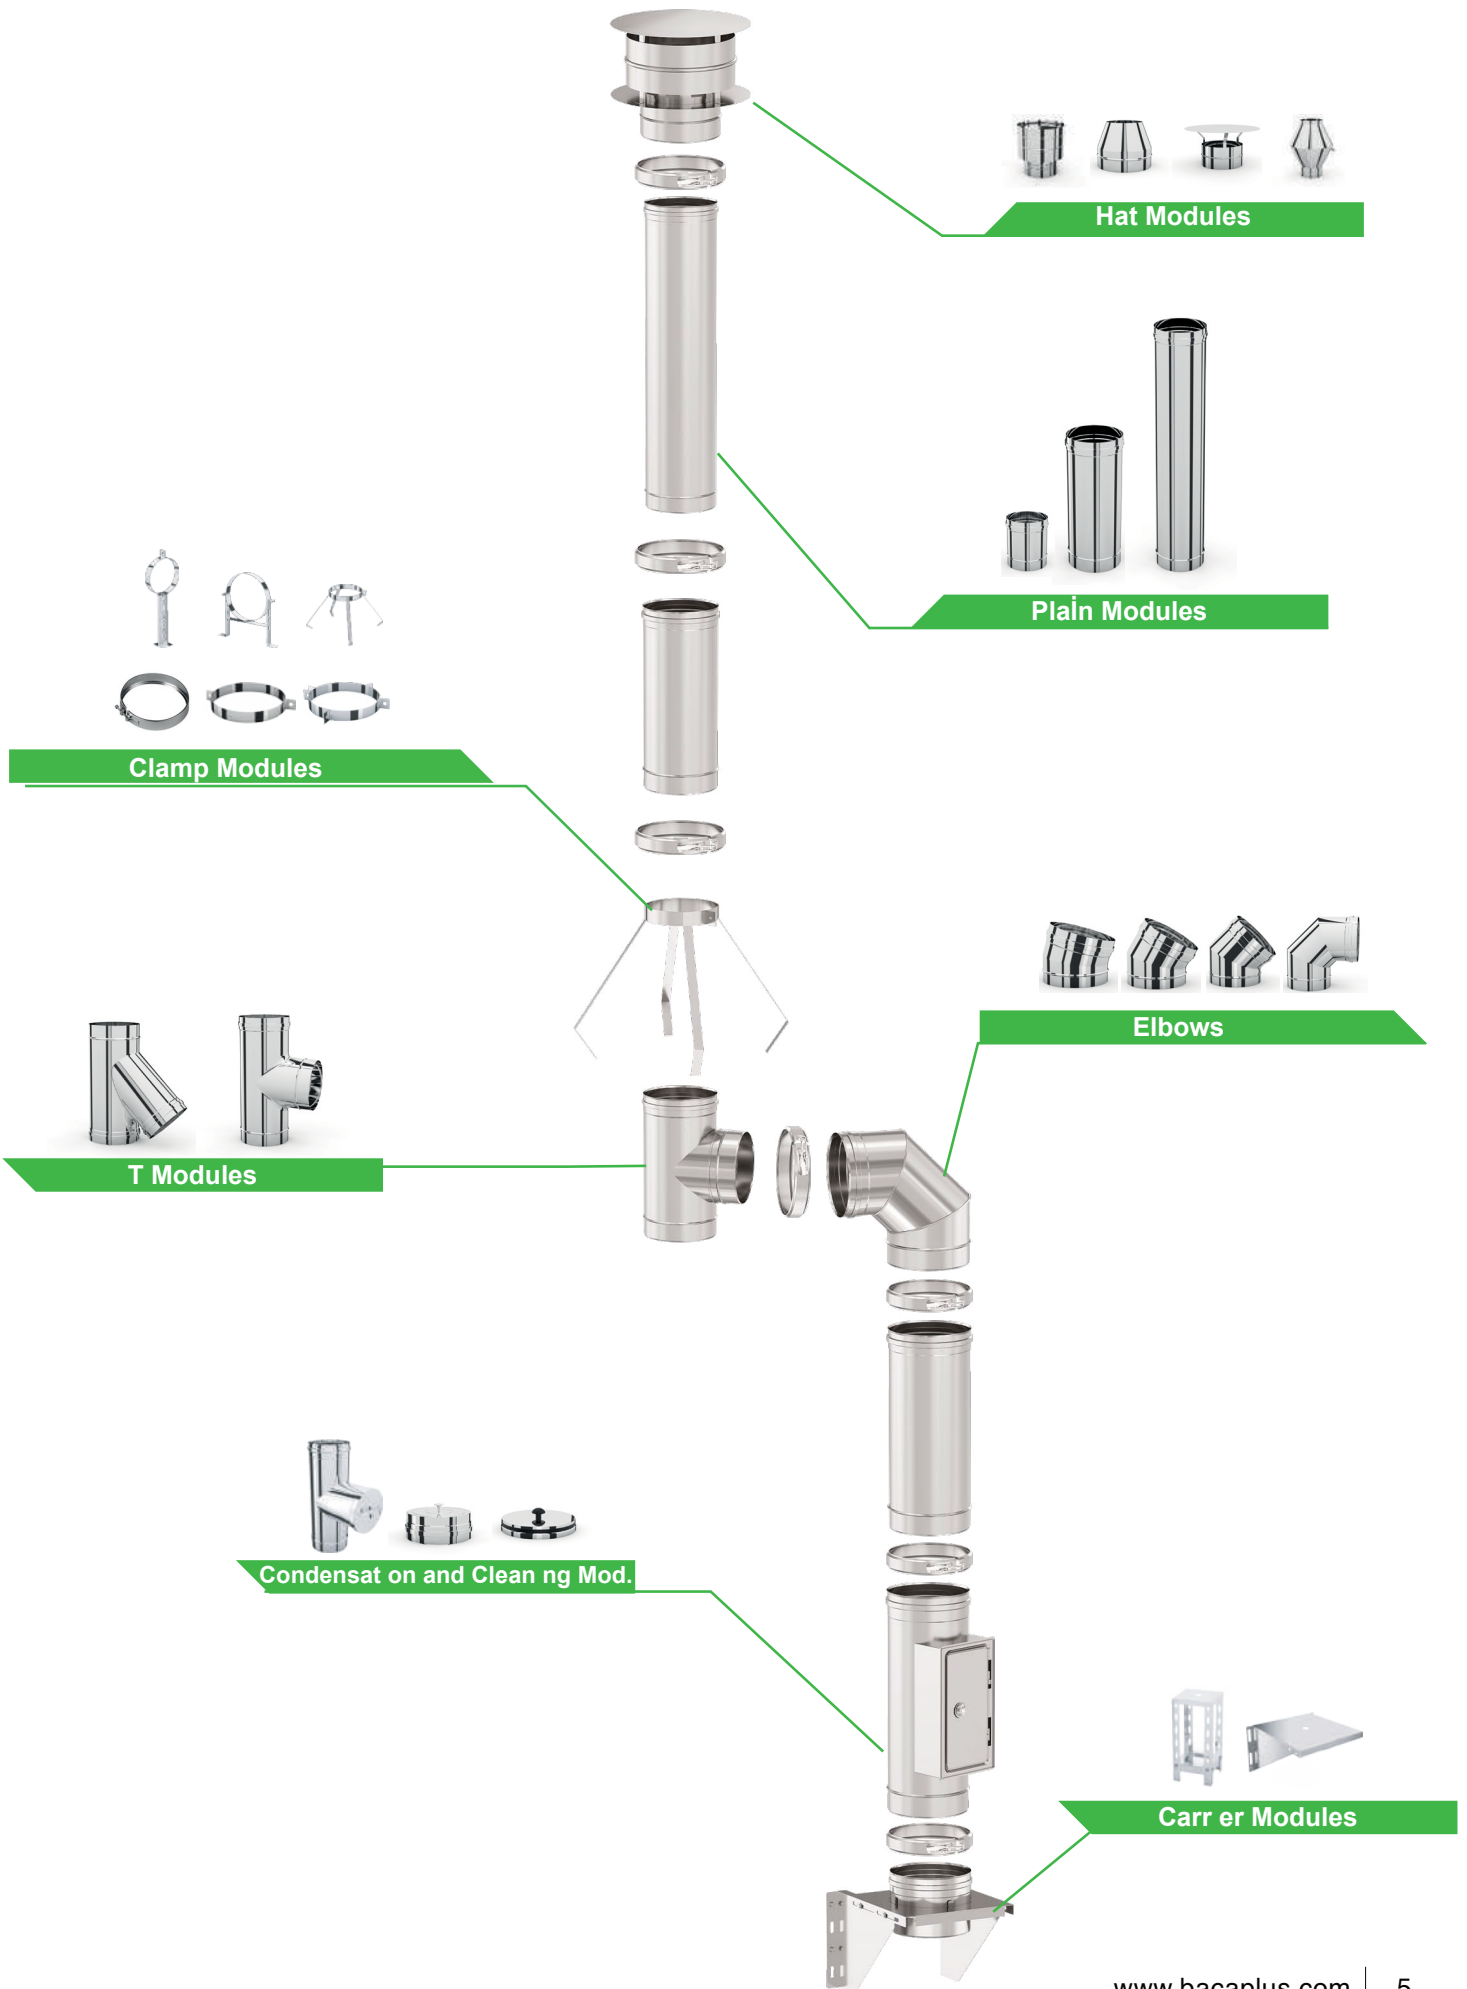


Plain Modules




BCPSW1000		Flat Module 1000 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50





BCPSW500		Flat Module 500 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




BCPSW250		Flat Module 250 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50





BCPSW47TD		Telescopic Support Module 270-470 mm									
D	100	150	200	250	300	350	400	450	500	550	600
Mn	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50

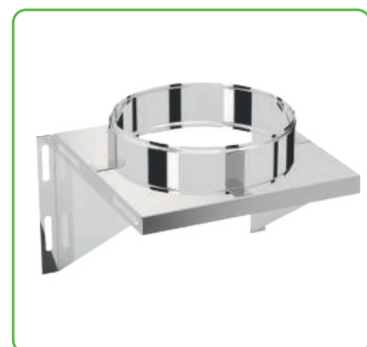


BCPSW90TD		Telescopic Support Module 550-900 mm									
D	100	150	200	250	300	350	400	450	500	550	600
Mn	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWD15		15° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	110	114	118	133	137	140	143	154	157	160	164
8	110	114	118	133	137	140	143	154	157	160	164
m	50	50	50	50	50	50	50	50	50	50	50

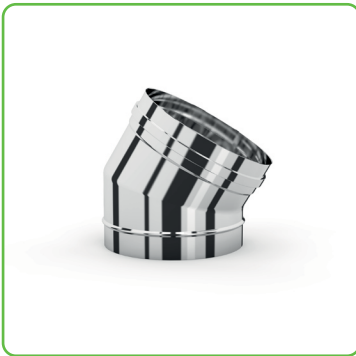

BCPSWD30		30° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	117	136	144	162	181	188	207	214	235	242	261
8	117	136	144	162	181	188	207	214	235	242	261
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWD45		45° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	138	160	180	205	216	241	264	292	308	332	372
B	138	160	180	205	216	241	264	292	308	332	372
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWD90		90° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	123	150	170	187	217	235	255	277	300	317	342
B	146	189	222	270	312	353	395	437	479	520	560
C	123	150	170	187	217	235	255	277	300	317	342
m	50	50	50	50	50	50	50	50	50	50	50


T Modules




BCPSWTM87	Tee Module 87°										
D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	350	450	450	550	550	650	650	700	950
B	135	160	185	210	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWTM90	Tee Module 90°										
D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	350	450	450	550	550	650	650	700	950
B	135	160	185	210	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWTM45	Tee Module 45°										
D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	450	550	650	650	950	950	950	999	1247
B	175	215	275	330	390	400	555	565	570	580	700
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWKT90	Cascade Tee 90°										
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200
C	100										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWTKM	Module with Cleaning Cover										
D	100	150	200	250	300	350	400	450	500	550	600
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWR	Reduction-Adaptor										
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50



BCPSWKR	Square Reduction										
D	100	150	200	250	300	350	400	450	500	550	600
H	-	-	-	-	-	-	-	-	-	-	-
BXB	-	-	-	-	-	-	-	-	-	-	-





BCPSWTK	Circular Cleaning Cover										
D	100	150	200	250	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80




BCPSWKC	Sealed Cap										
D	100	150	200	250	300	350	400	450	500	550	600
A	107	157	207	257	307	357	407	457	507	557	607


Measurement Modules

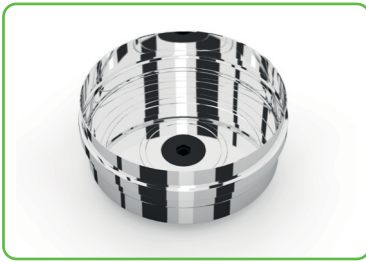


BCPSWYT		Condensate Collector									
D	100	150	200	250	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80




BCPSWYT		Horizontal Condensate Collector									
D	100	150	200	250	300	350	400	450	500	550	600
A	130	130	130	130	130	130	130	130	130	130	130




BCPSWOM250		Measurement Module 250 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	200										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWOM500		Measurement Module 500 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	450										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWOM1000		Measurement Module 1000 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	950										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWCS		Chinese Hat									
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50



BCPSWYKS		Rain Protected Hat									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	250	250	250	250	250	250	250	250	250
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWKS		Conus Hat									
D	100	150	200	250	300	350	400	450	500	550	600
H	140	140	140	140	170	170	170	170	170	170	170
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWJC		Jet Cap									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	300	400	500	600	700	800	900	900	950	1000
A	175	260	350	440	525	600	650	700	750	800	850



Accessory Modules




BCPSWTT		Basic Carrier									
D	100	150	200	250	300	350	400	450	500	550	600
A	150	150	200	250	300	350	400	450	500	550	600
B	360	360	360	360	360	360	360	360	360	360	360

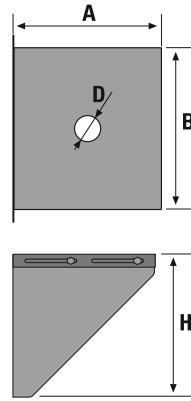



BCPSWDTS		Wall-Type Stand									
D	100	150	200	250	300	350	400	450	500	550	600
A	170	220	270	320	370	420	470	520	570	620	670
B	200	250	300	350	400	450	500	550	600	650	700
H	170	220	270	320	370	420	470	520	570	620	670

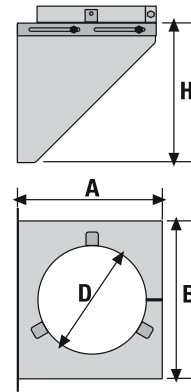

BCPSWKST		Clamped Table Carrier									
D	100	150	200	250	300	350	400	450	500	550	600
A	170	220	270	320	370	420	470	520	570	620	670
B	200	250	300	350	400	450	500	550	600	650	700
H	170	220	270	320	370	420	470	520	570	620	670




BCPSWDSK		Wall Mounting Clamp									
D	100	150	200	250	300	350	400	450	500	550	600
A	130	175	225	276	300	329	380	430	480	508	536
X	55-75	60 mm									

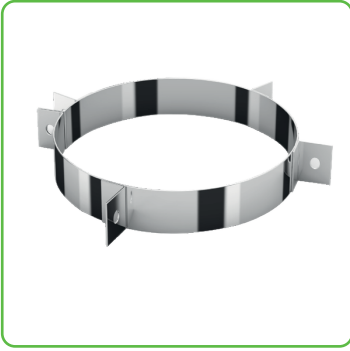


BCPSWGK Tensioning Clamp

D	100	150	200	250	300	350	400	450	500	550	600
---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----




BCPSWAK Hanger Clamp

D	100	150	200	250	300	350	400	450	500	550	600
---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----



BCPSWCOB Roof Cover Ring


D	100	100	150	200	250	300	350	400	450	500	550	600	650
A	190	210	260	310	390	440	490	540	590	640	690	740	790
C	80	80	80	80	80	100	100	100	100	100	100	100	100





BCPSWHT Crescent Carrier

D	100	100	150	200	250	300	350	400	450	500	550	600
C	200 - 300 - 400 - 500 - 600 mm											



Accessory Modules





BCPSWBK		Joining Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	
A	47 mm											

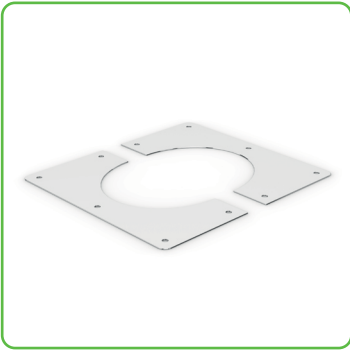



BCPSWDK30		Wall Cover 30											
D	100	150	200	250	300	350	400	450	500	550	600	650	
A	300	350	400	450	500	550	600	650	-	-	-	-	
B	160	190	220	250	280	310	335	360	-	-	-	-	

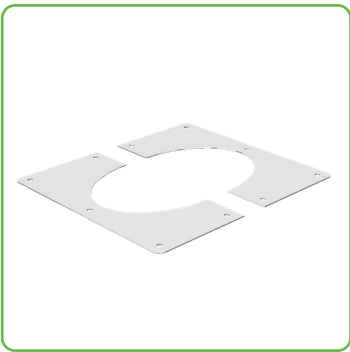



BCPSWDK45		Wall Cover 45											
D	100	150	200	250	300	350	400	450	500	550	600	650	
A	300	350	400	450	500	550	600	650	-	-	-	-	
B	175	210	245	280	320	350	410	460	-	-	-	-	

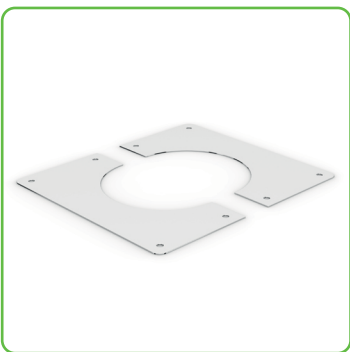


BCPSWDK90		Wall Cover 90											
D	100	150	200	250	300	350	400	450	500	550	600	650	
A	300	350	400	450	500	550	600	650	-	-	-	-	
B	160	185	210	235	260	285	310	335	-	-	-	-	

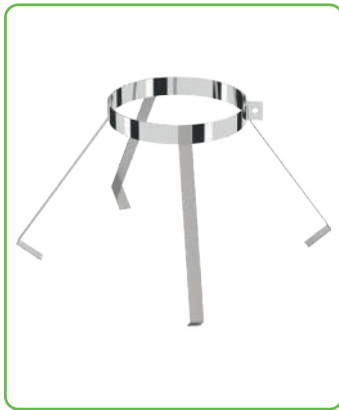


BCPSWAK		Octopus Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	650

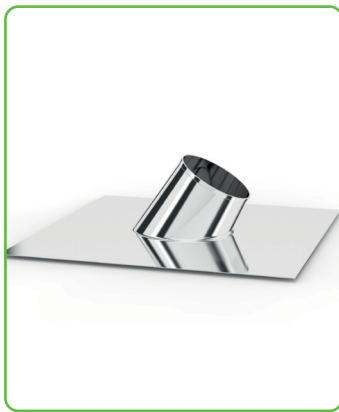


BCPSWCOK30		Roof Cover Coating 30										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	550	600	660	710	770	820	880	930	980	-	-	-
B	530	580	640	690	750	800	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	130	195	255	310	370	425	485	540	600	-	-	-



BCPSWCOK45		Roof Cover Coating 45										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	555	640	710	780	850	920	960	1000	1100	-	-	-
B	535	620	690	760	830	900	940	980	1080	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	155	240	310	380	450	520	590	665	735	-	-	-



BCPSWCOK90		Roof Cover Coating 90										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	560	610	660	710	760	810	860	910	960	-	-	-
B	560	610	660	710	760	810	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	160	210	260	310	360	410	460	510	560	-	-	-

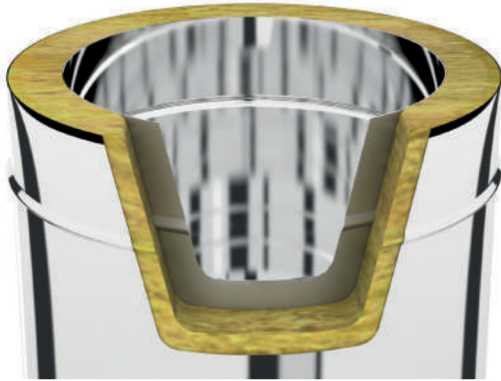

Essential Features

- Simple and fast installation.
- Suitable for indoor and outdoor applications.
- High density rock wool insulation.

Muff	: 50 mm
Welding Type	: Continuous TIG Welding
Thickness	: 0.40 mm - 1.50 mm
Connection type	: Male / Female Connections
Diameter Range	: Ø 100 mm to 1200 mm

Technical Features

Operation Type	: Wet (W) (sealed use)
Pressure Type	: Positive (P1) (sealed use) Negative (N1) (use without gasket)
Max. Operating Pressure	: 200 Pa
Working Temperature	: 100 °C 400 °C
Material	: AISI 316 (1.4404), AISI 430L (1.4016) AISI 304 (1.4301)
Fuel Type	: Natural gas / Solid fuel / Liquid fuel

Fields of Application


- Central heating and hot water systems
- Industrial and commercial chimney systems
- Bread ovens
- Fireplaces
- Vents


Certificates

T400-N1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-P1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-N1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-P1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-N1-W-Vm-L50-(60&150)-O600,Ø451-1000
T400-P1-W-Vm-L50-(60&150)-O600,Ø451-1000


Chimney Labeling

Product Type	TSEN 1856	T400	N1	W	Vm	L50	040	Q150
Standard Number	←							
Temperature Class	←							
Pressure Class	←							
Condensation Product Resistance	←							
Corrosivity category	←							
Chimney Material	←							
Chimney Material Thickness	←							
Soot Fire Resistance Distance to Flammable Substances	←							

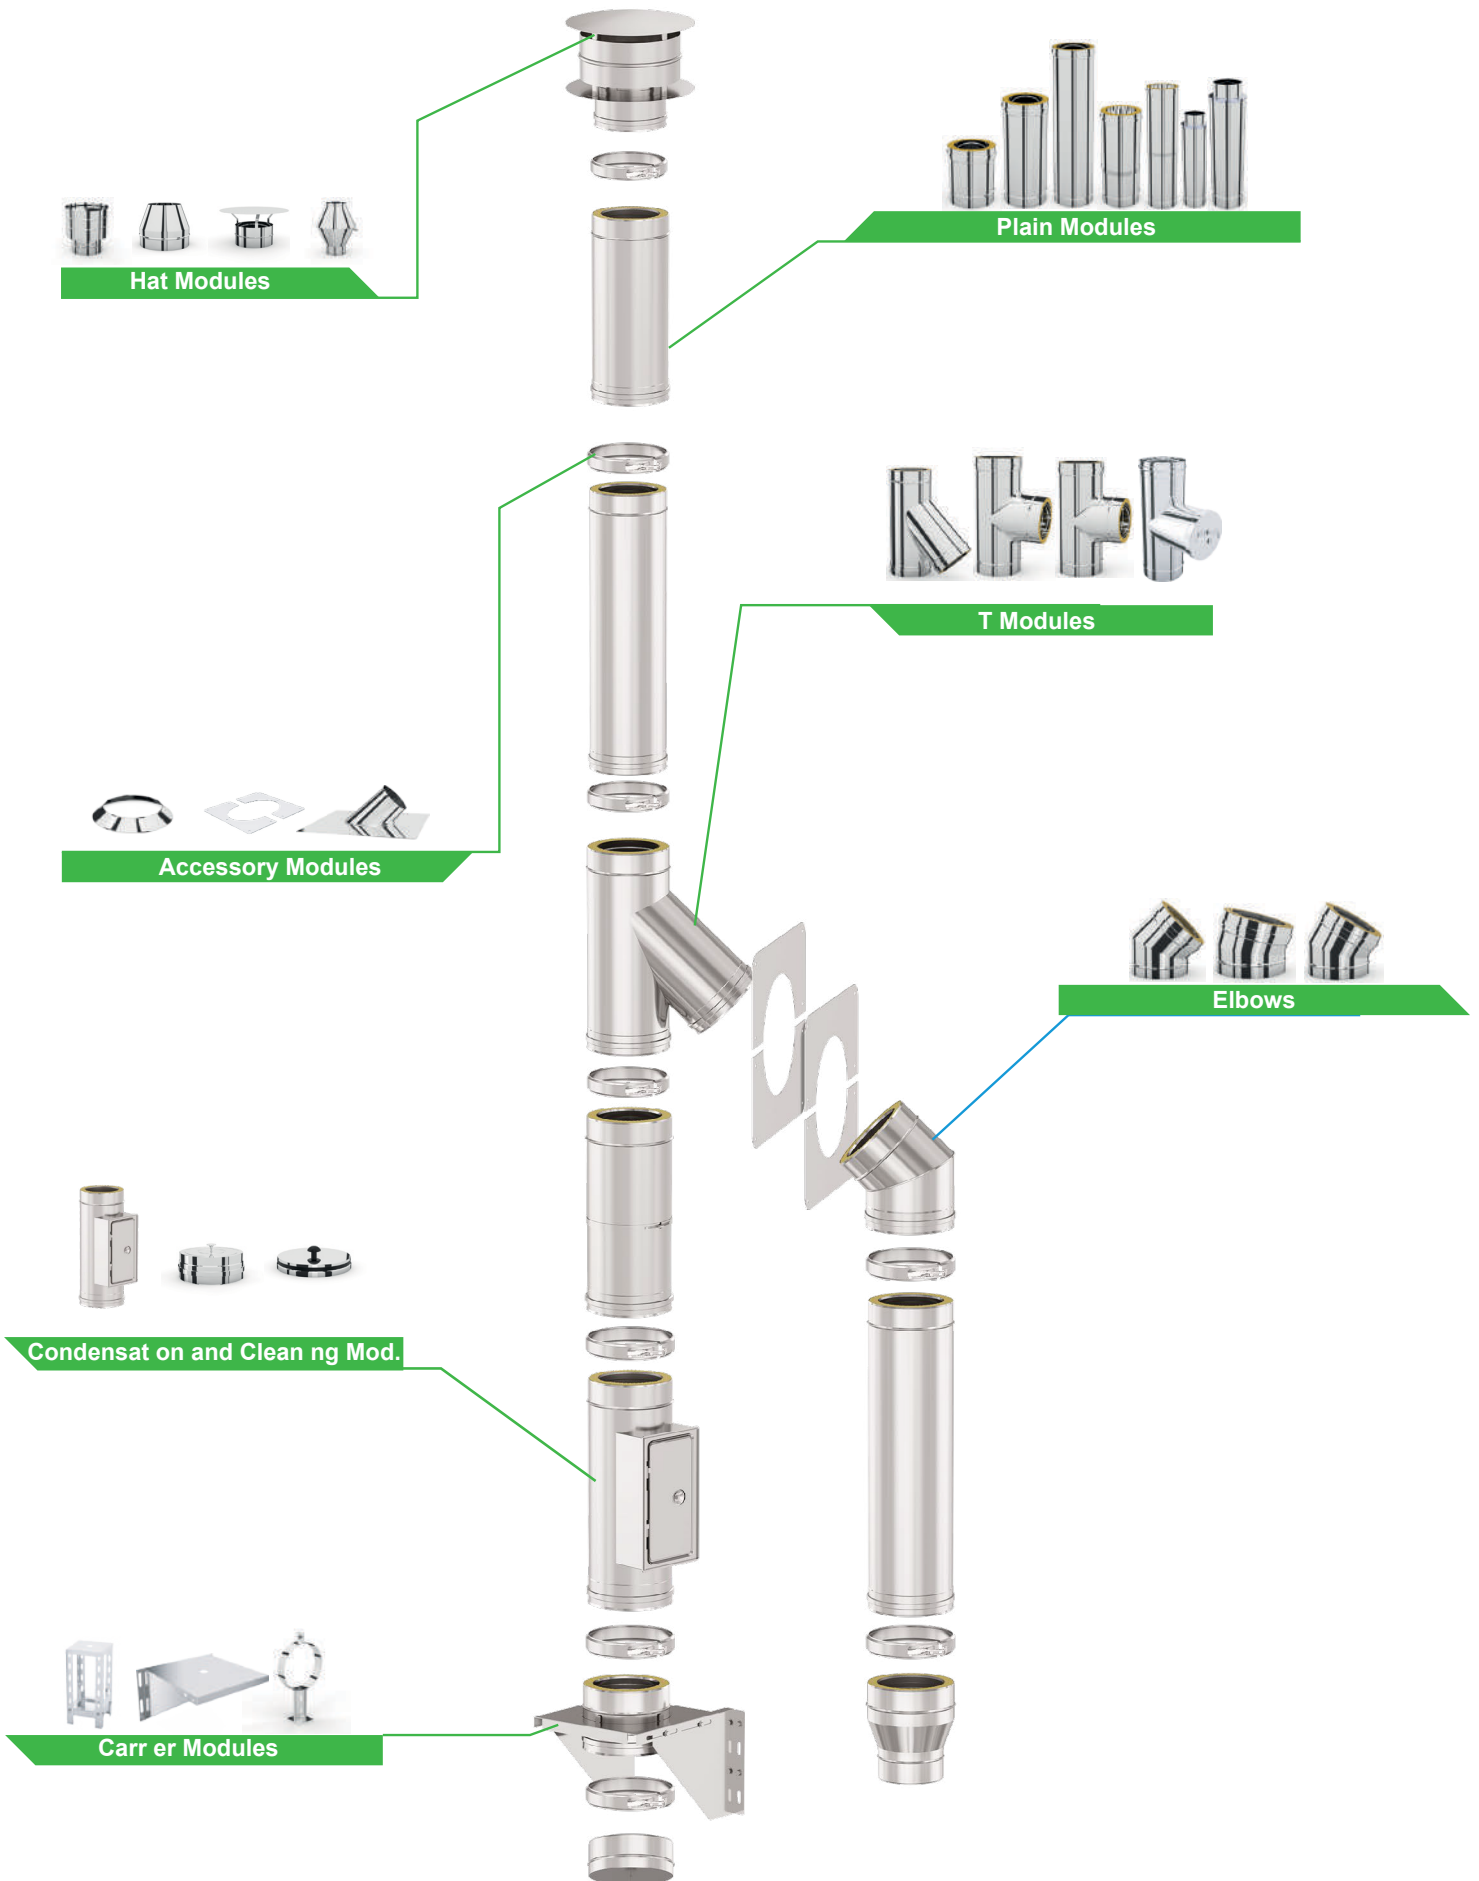





BCPDW250	Insulated Flat Module 250 mm										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW500	Insulated Flat Module 500 mm										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




BCPXAB1000	Insulated Flat Module 1000 mm										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWTM47		Isolated Telescopic Module 270-470 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
Min	240	240	240	240	240	240	240	240	240	240	240
Max	420	420	420	420	420	420	420	420	420	420	420
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWTM90		Isolated Telescopic Module 550-900 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
Min	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50





BCPDWBM500		Starter Module 500 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	-	-	-	-	-	-
m	50	50	50	50	50	-	-	-	-	-	-




BCPDWBM1000		Starter Module 1000 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	-	-	-	-	-	-
m	50	50	50	50	50	-	-	-	-	-	-




BCPDW15		Insulated Elbow 15°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	114	118	121	136	140	143	146	157	161	164	167
B	114	118	121	136	140	143	146	157	161	164	167
m	50	50	50	50	50	50	50	50	50	50	50

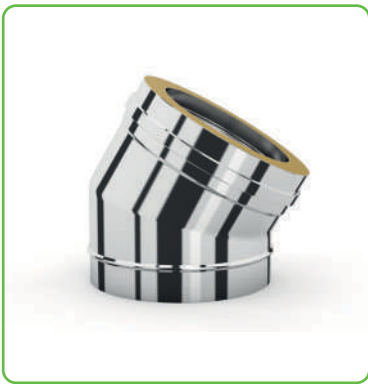


BCPDW30		Insulated Elbow 30°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	125	143	150	170	189	195	215	222	243	250	269
B	125	143	150	170	189	195	215	222	243	250	269
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW45		Insulated Elbow 45°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	148	170	194	217	227	253	275	303	319	344	384
B	148	170	194	217	227	253	275	303	319	344	384
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW90		Insulated Elbow 90°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	133	160	178	198	228	246	265	287	312	327	352
B	168	210	250	292	333	374	417	459	500	540	583
C	133	160	178	198	228	246	265	287	312	327	352
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWTP87		Insulated T-Piece 87°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	350	450	450	450	550	550	650	700	700	950	950
B	160	185	210	235	260	295	320	345	370	420	445
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWTP90		Insulated T-Piece 90°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	350	450	450	450	550	550	650	700	700	950	950
B	160	185	210	235	260	295	320	345	370	420	445
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWTP45		Insulated T-Piece 45°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	350	450	550	650	650	950	950	950	950	1200	1200
B	210	270	325	385	390	550	555	565	580	705	705
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWTKM	Module with Cleaning Cover										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	256	256	256	256	256	256	256	256	256	256	256
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWDTK	Isolated Circular Cleaning Cover										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	80	80	80	80	80	80	80	80	80	80	80




BCPDWYT	Isolated Condensate Collector										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	80	80	80	80	80	80	80	80	80	80	80




BCPDWOM250		Isolated Measurement Module 250 mm										
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
H	200	200	200	200	200	200	200	200	200	200	200	
m	50	50	50	50	50	50	50	50	50	50	50	




BCPDWOM500		Isolated Measurement Module 500 mm										
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
H	450	450	450	450	450	450	450	450	450	450	450	
m	50	50	50	50	50	50	50	50	50	50	50	




BCPDWOM1000		Isolated Measurement Module 1000 mm										
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
H	950	950	950	950	950	950	950	950	950	950	950	
m	50	50	50	50	50	50	50	50	50	50	50	




BCPDWCOM250		2" Roof Measurement Module 250 mm										
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
C	100	100	100	100	100	100	100	100	100	100	100	
M	50	50	50	50	50	50	50	50	50	50	50	




BCPDWCS		Chinese Hat									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	170	170	170	170	170	-	-	-	-	-	-




BCPDWYS		Rain Protected Hat									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	250	250	300	300	300	-	-	-	-	-	-




BCPDWKS		Conus Hat									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	200	200	250	250	250	250	250	300	300	300	300




BCPDWJC		Jet Cap									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	300	400	500	600	700	800	900	900	950	1000	1050
A	260	350	440	525	600	650	700	750	800	850	900




BCPDWTT		Basic Carrier									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	150	200	250	300	350	400	450	500	550	600	650
B	360	360	360	360	360	360	360	360	360	360	360




BCPDWKTS		Wall-Type Stand									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	220	270	320	370	420	470	520	570	620	670	720
B	270	320	370	420	470	520	570	620	670	720	770
H	220	270	320	370	420	470	520	570	620	670	720




BCPDWDSK		Wall Mounting Clamp									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	175	225	276	300	329	380	430	480	508	536	-
X	60 mm										





BCPDWAK		Hanger Clamp									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650





BCPDWCOB		Roof Cover Ring									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	260	310	390	440	490	540	590	640	690	740	790
C	80	80	80	100	100	100	100	100	100	100	100





BCPDWHT		Crescent Carrier									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
C	200 - 300 - 400 - 500 - 600 mm										

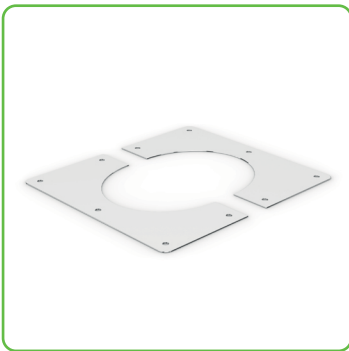



BCPDWDK30		Wall Cover 30									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	350	400	450	500	550	600	650	-	-	-	-
B	190	220	250	280	310	335	360	-	-	-	-





BCPDWDK45		Wall Cover 45									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	350	400	450	500	550	600	650	-	-	-	-
B	210	245	280	320	350	410	460	-	-	-	-

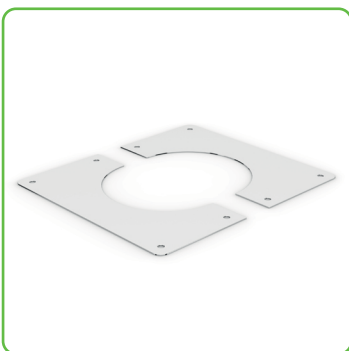


BCPDWDK90		Wall Cover 90									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	350	400	450	500	550	600	650	-	-	-	-
B	185	210	235	260	285	310	335	-	-	-	-





BCPDWAK		Octopus Clamp									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650



BCPDWCOK30		Roof Cover Coating 30									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	600	660	710	770	820	880	930	980	-	-	-
B	580	640	690	750	800	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	-	-	-
C	195	255	310	370	425	485	540	600	-	-	-



BCPDWCOK45		Roof Cover Coating 45									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	640	710	780	850	920	960	1000	1100	-	-	-
B	620	690	760	830	900	940	980	1080	-	-	-
H	150	150	150	150	150	150	150	150	-	-	-
C	240	310	380	450	520	590	665	735	-	-	-



BCPDWCOK90		Roof Cover Coating 90									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	610	660	710	760	810	860	910	960	-	-	-
B	610	660	710	760	810	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	-	-	-
C	210	260	310	360	410	460	510	560	-	-	-



Essential Features

- Simple and fast installation.
- Suitable for in-shaft applications.

Muff	: 50 mm
Weld Type	: Continuous TIG Welding
Thickness	: 0.40 - 0.50 - 0.60 mm
Connection type	: Male / Female Connections
Diameter Range	: Ø 100 mm

Technical Features

Pressure Type	: Negative (N1) (40 Pa)
Corrosion Resistance Class	: V2 (Pellet)
Standard Number	: EN 1856 - 1 : 2009 EN 1856 - 2 : 2009
Malzeme	: AISI 316L (1.4404) AISI 304 (1.4301)
Fuel Type	: Solid Fuel

Fields of Application

- Pellet Stoves

Certificates


T400-N1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-P1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-N1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-P1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-N1-W-Vm-L50-(60&150)O600,Ø451-1200
T400-P1-W-Vm-L50-(60&150)O600,Ø451-1200

Chimney Labeling


	TSEN 1856	T400	N1	W	Vm	L50	O40	Q150
Product Type								
Standard Number	←							
Temperature Class	←	←						
Pressure Class	←	←	←					
Condensation Product Resistance	←	←	←	←				
Corrosivity category	←	←	←	←	←			
Chimney Material	←	←	←	←	←	←		
Chimney Material Thickness	←	←	←	←	←	←	←	
Soot Fire Resistance Distance to Flammable Substances	←	←	←	←	←	←	←	←




BCPSWP1000		Flat Module 1000 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWP500		Flat Module 500 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50





BCPSWP250		Flat Module 250 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPD15		15° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	110	114	118	133	137	140	143	154	157	160	164
B	110	114	118	133	137	140	143	154	157	160	164
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPD30		30° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	117	136	144	162	181	188	207	214	235	242	261
B	117	136	144	162	181	188	207	214	235	242	261
m	50	50	50	50	50	50	50	50	50	50	50

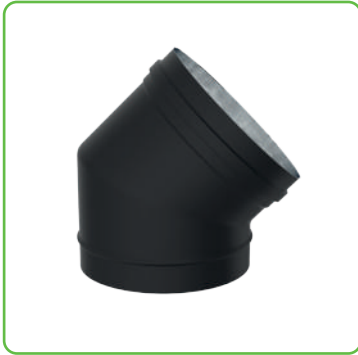


BCPSWPD45		45° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	138	160	180	205	216	241	264	292	308	332	372
B	138	160	180	205	216	241	264	292	308	332	372
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPD90		90° Elbow									
D	100	150	200	250	300	350	400	450	500	550	600
A	123	150	170	187	217	235	255	277	300	317	342
B	146	189	222	270	312	353	395	437	479	520	560
C	123	150	170	187	217	235	255	277	300	317	342
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPTM45		Tee Module 45°									
D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	450	550	650	650	950	950	950	999	1247
B	175	215	275	330	390	400	555	565	570	580	700
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPTM87		Tee Module 87°									
D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	350	450	450	550	550	650	650	700	950
B	135	160	185	210	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPTM90		Tee Module 90°									
D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	350	450	450	550	550	650	650	700	950
B	135	160	185	210	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPKT90		Cascade Tee 90°									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200
C	100										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPYT		Condensate Collector									
D	100	150	200	250	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80




BCPSWPOM250		Measurement Module 250 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	200										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPOM500		Measurement Module 500 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	450										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPOM1000		Measurement Module 1000 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	950										
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPICS		Chinese Hat									
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPYKS		Rain Protected Hat									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	250	250	250	250	250	250	250	250	250
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPR		Reduction-Adaptor									
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50




BCPSWPDSK		Wall Mounting Clamp									
D	100	150	200	250	300	350	400	450	500	550	600
A	130	175	225	276	300	329	380	430	480	508	536
X	55-75	60 mm									




BCPSWPGK		Tensioning Clamp									
D	100	150	200	250	300	350	400	450	500	550	600



BCPSWPHT		Crescent Carrier										
D	100	100	150	200	250	300	350	400	450	500	550	600
C	200 - 300 - 400 - 500 - 600 mm											



BCPSWPK45		Wall Cover 45										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	300	350	400	450	500	550	600	650	-	-	-	-
B	175	210	245	280	320	350	410	460	-	-	-	-

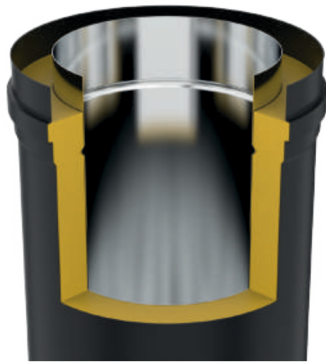

Essential Features

- Simple and fast installation.
- Suitable for indoor and outdoor applications.
- High density rock wool insulation.

Muff	: 50 mm
Welding Type	: Continuous TIG Welding
Thickness	: 0.40 - 0.50 - 0.60 mm
Connection type	: Male / Female Connections
Diameter Range	: Ø 100 mm

Technical Features

Pressure Type	: Negative (N1) (40 Pa)
Corrosion Resistance Class	: V2 (Pellet)
Standard Number	: EN 1856 - 1 : 2009 EN 1856 - 2 : 2009
Material	: AISI 316L (1.4404) AISI 304 (1.4301)
Fuel Type	: Solid Fuel


Fields of Application


- Pellet Stoves

Certificates


T400-N1-W-Vm-L50-(40&100)-O150,Ø100-300
 T400-P1-W-Vm-L50-(40&100)-O150,Ø100-300
 T400-N1-W-Vm-L50-(40&120)-O300,Ø301-450
 T400-P1-W-Vm-L50-(40&120)-O300,Ø301-450
 T400-N1-W-Vm-L50-(60&150)-O600,Ø451-1000
 T400-P1-W-Vm-L50-(60&150)-O600,Ø451-1000

Chimney Labeling

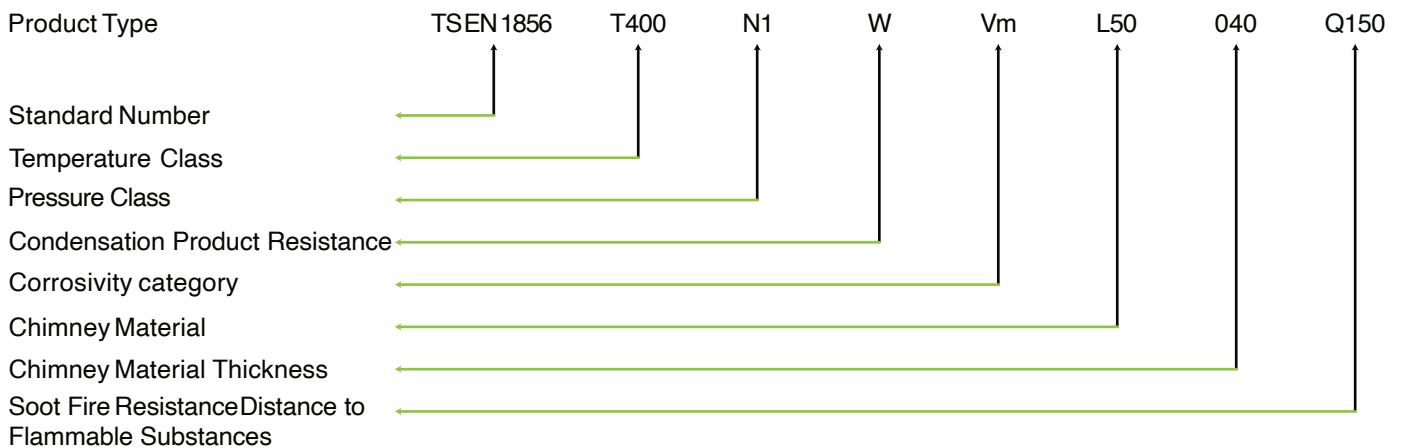





BCPDWP250		Insulated Flat Module 250 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWP500		Insulated Flat Module 500 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWP1000		Insulated Flat Module 1000 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW15		Insulated Elbow 15°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	114	118	121	136	140	143	146	157	161	164	167
B	114	118	121	136	140	143	146	157	161	164	167
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW30		Insulated Elbow 30°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	125	143	150	170	189	195	215	222	243	250	269
B	125	143	150	170	189	195	215	222	243	250	269
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW45		Insulated Elbow 45°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	148	170	194	217	227	253	275	303	319	344	384
B	148	170	194	217	227	253	275	303	319	344	384
m	50	50	50	50	50	50	50	50	50	50	50




BCPDW90		Insulated Elbow 90°									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	133	160	178	198	228	246	265	287	312	327	352
B	168	210	250	292	333	374	417	459	500	540	583
C	133	160	178	198	228	246	265	287	312	327	352
m	50	50	50	50	50	50	50	50	50	50	50




BCPDWBM500	Starter Module 500 mm										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	-	-	-	-	-	-
m	50	50	50	50	50	-	-	-	-	-	-




BCPDWBM1000	Starter Module 1000 mm										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	-	-	-	-	-	-
m	50	50	50	50	50	-	-	-	-	-	-




BCPDWPR	Reduction-Adaptor										
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50





BCPDWPKR	Square Reduction										
D	100	150	200	250	300	350	400	450	500	550	600
H	-	-	-	-	-	-	-	-	-	-	-
BXB	-	-	-	-	-	-	-	-	-	-	-




BCPDWPTK	Circular Cleaning Cover										
D	100	150	200	250	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80




BCPDWPGK		Tensioning Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	

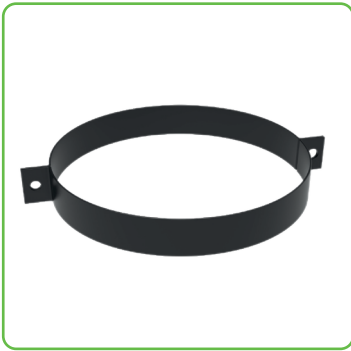


BCPDWPAK		Hanger Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	




BCPDWPBK		Joining Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	
A	47 mm											




BCPDWPSK		Wall Mounting Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	
A	130	175	225	276	300	329	380	430	480	508	536	
X	55-75	60 mm										




BCPDWPCOB		Roof Cover Ring											
D	100	100	150	200	250	300	350	400	450	500	550	600	650
A	190	210	260	310	390	440	490	540	590	640	690	740	790
C	80	80	80	80	80	100	100	100	100	100	100	100	100




BCPDWPKST		Clamped Table Carrier									
D	100	150	200	250	300	350	400	450	500	550	600
A	170	220	270	320	370	420	470	520	570	620	670
B	200	250	300	350	400	450	500	550	600	650	700
H	170	220	270	320	370	420	470	520	570	620	670





BCPDWPH7		Crescent Carrier									
D	100	150	200	250	300	350	400	450	500	550	600
C	200 - 300 - 400 - 500 - 600 mm										





BCPDWPK30		Wall Cover 30										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	300	350	400	450	500	550	600	650	-	-	-	-
B	160	190	220	250	280	310	335	360	-	-	-	-




BCPDWPK45		Wall Cover 45										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	300	350	400	450	500	550	600	650	-	-	-	-
B	175	210	245	280	320	350	410	460	-	-	-	-

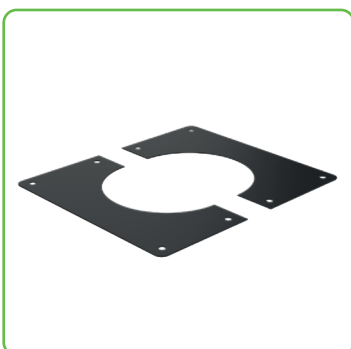



BCPDWPK90		Wall Cover 90										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	300	350	400	450	500	550	600	650	-	-	-	-
B	160	185	210	235	260	285	310	335	-	-	-	-

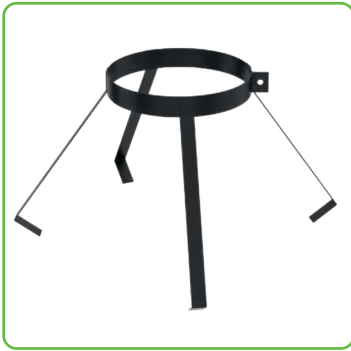



BCPDWPAK		Octopus Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	650




BCPDWPTT		Basic Carrier										
D	100	150	200	250	300	350	400	450	500	550	600	
A	150	150	200	250	300	350	400	450	500	550	600	
B	360	360	360	360	360	360	360	360	360	360	360	

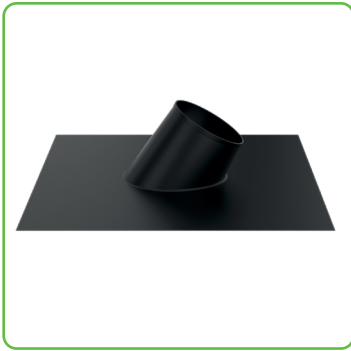

BCPDWPCOK30		Roof Cover Coating 30										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	550	600	660	710	770	820	880	930	980	-	-	-
B	530	580	640	690	750	800	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	130	195	255	310	370	425	485	540	600	-	-	-

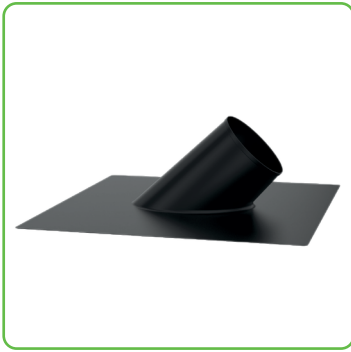


BCPDWPCOK45		Roof Cover Coating 45										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	555	640	710	780	850	920	960	1000	1100	-	-	-
B	535	620	690	760	830	900	940	980	1080	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	155	240	310	380	450	520	590	665	735	-	-	-



BCPDWPCOK90		Roof Cover Coating 90										
D	100	150	200	250	300	350	400	450	500	550	600	650
A	560	610	660	710	760	810	860	910	960	-	-	-
B	560	610	660	710	760	810	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	160	210	260	310	360	410	460	510	560	-	-	-

Project Planning Sketch

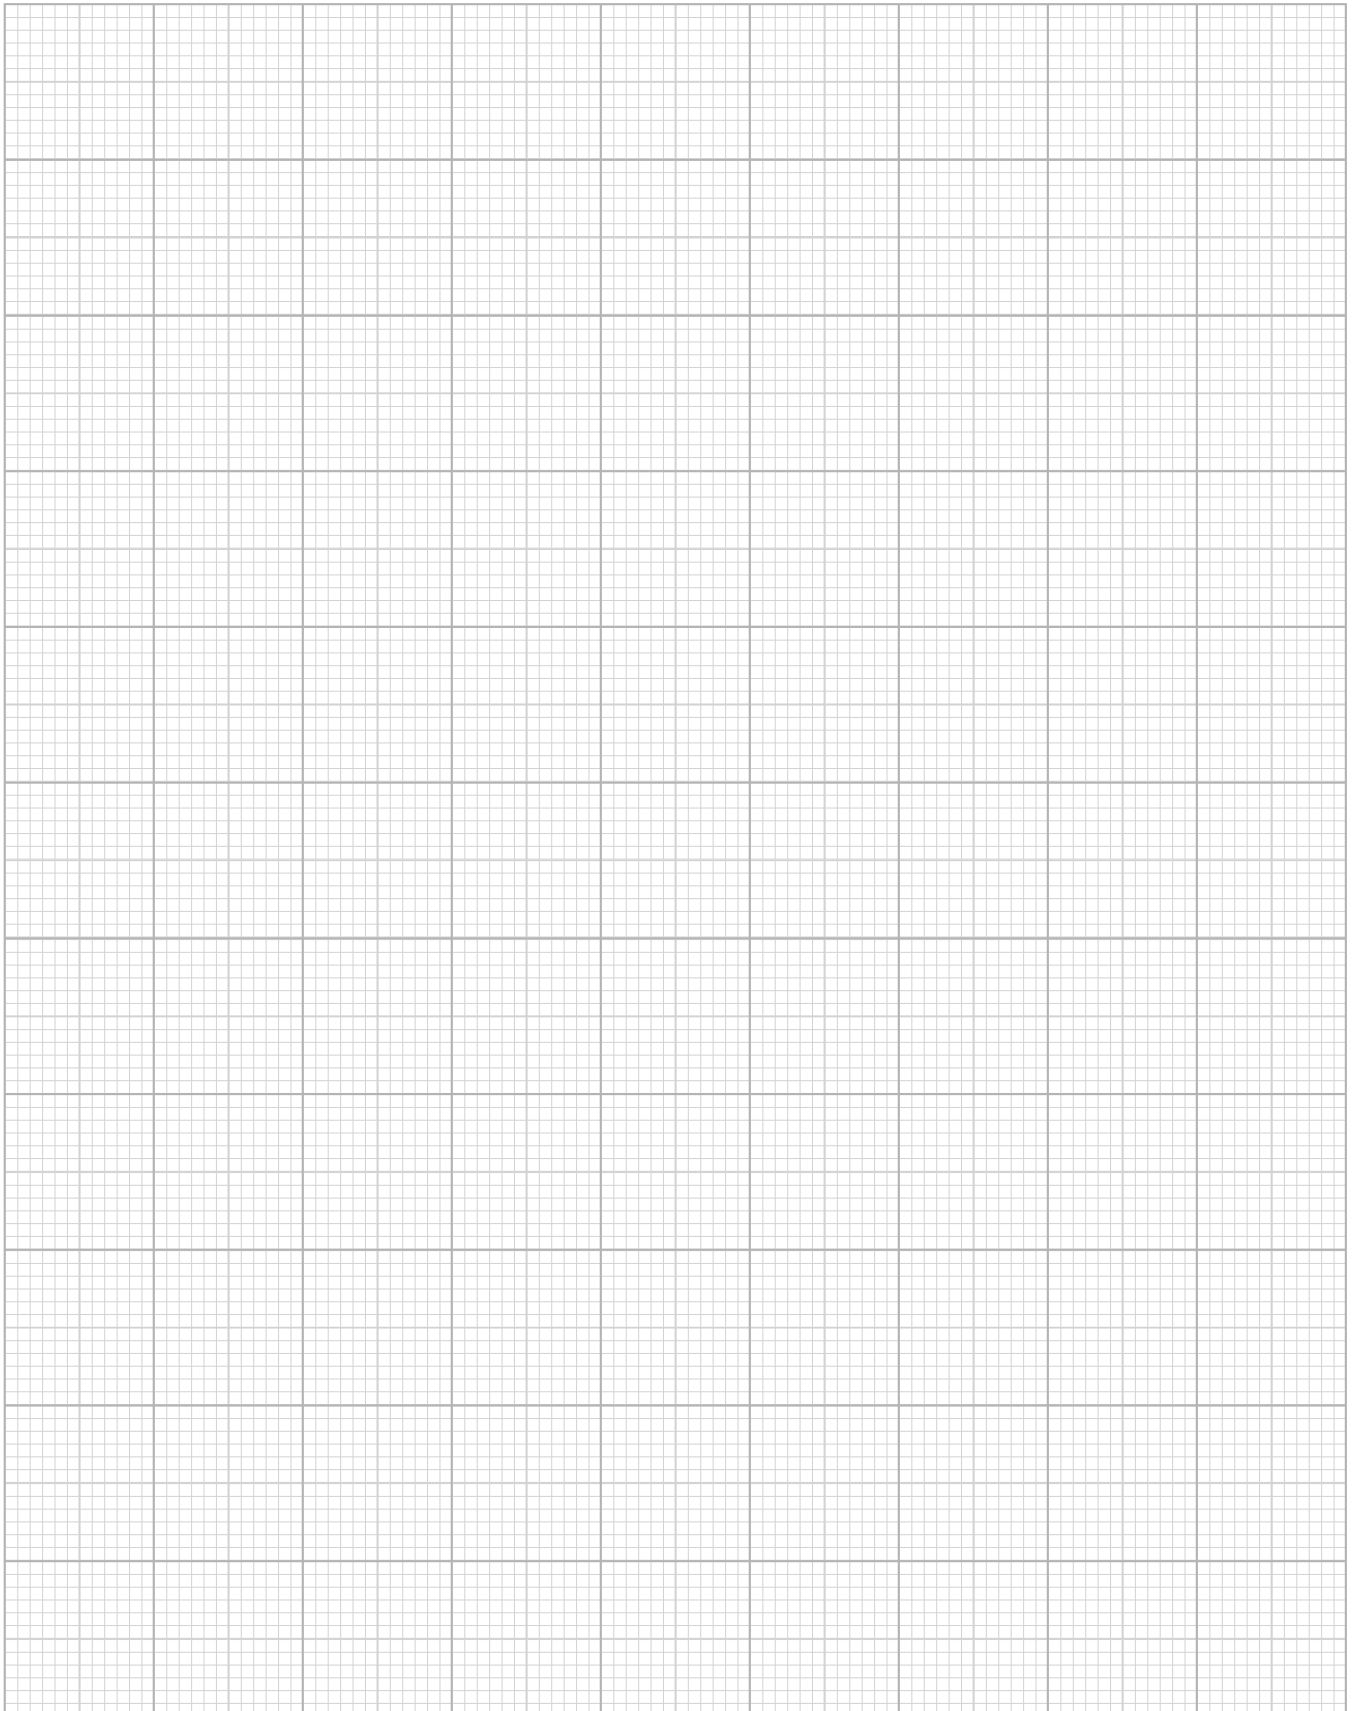

Date Of Installation :

Installers :

Project Details :



Contact Us

info@bacaplus.com

Foreign Trade Manager
export@bacaplus.com

Domestic Sales Manager
maamoun95@outlook.com

